

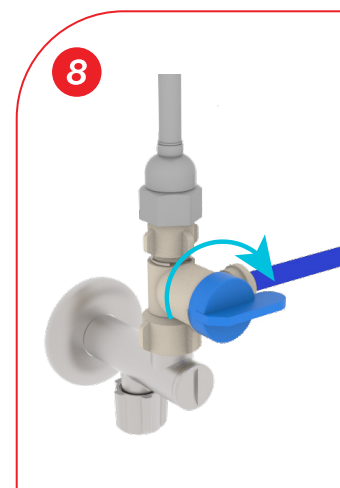


ISTRUZIONI CONDIZIONAMENTO CONDITIONING INSTRUCTIONS

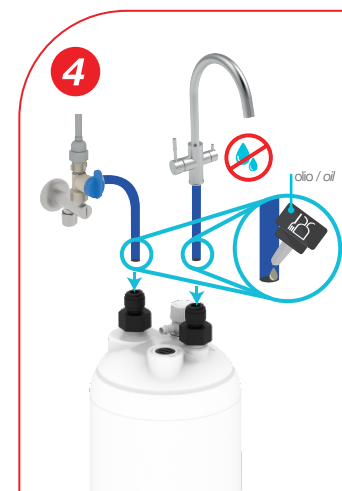

MKCA FILTRATION CHART								
Water entry hardness °dH	Output hardness °dH with differnt bypass				Max filtration (duration) in liters available with different bypass			
L	15-25% (I)	25-40% (II)	40-55% (III)	55-70% (IIII)	15-25% (I)	25-40% (II)	40-55% (III)	55-70% (IIII)
1	0	0	0	1	36404	40955	43989	48539
1	0	1	1	1	18202	20478	21994	24270
1	1	1	1	2	12135	13652	14663	16180
1	1	1	2	2	9101	10239	10997	12135
1	1	2	2	3	7281	8191	8798	9708
1	1	2	3	4	6067	6826	7331	8090
1	1	2	3	4	5201	5851	6284	6934
1	2	3	4	5	4551	5119	5499	6067
1	2	3	4	5	4045	4551	4888	5393
1	2	4	5	6	3640	4096	4399	4854
1	2	4	5	7	3309	3723	3999	4413
1	2	4	5	7	3034	3413	3666	4045
1	3	5	6	8	2800	3150	3384	3734
1	3	5	6	8	2600	2925	3142	3467
1	3	5	7	9	2427	2730	2933	3236
1	3	6	7	10	2275	2560	2749	3034
1	3	6	8	10	2141	2409	2588	2855
1	4	6	8	11	2022	2275	2444	2697
1	4	7	9	11	1916	2156	2315	2555
1	4	7	9	12	1820	2048	2199	2427
1	4	7	9	13	1734	1950	2095	2311
1	4	8	10	13	1655	1862	1999	2206
1	5	8	10	14	1583	1781	1913	2110
1	5	8	11	14	1517	1706	1833	2022
1	5	9	11	15	1456	1638	1760	1942
1	5	9	12	16	1400	1575	1692	1867
1	5	9	12	16	1348	1517	1629	1798
1	6	10	13	17	1300	1463	1571	1734
1	6	10	13	17	1255	1412	1517	1674
1	6	11	14	18	1213	1365	1466	1618
1	6	11	14	19	1174	1321	1419	1566
1	6	11	14	19	1138	1280	1375	1517
1	7	12	15	20	1103	1241	1333	1471
1	7	12	15	20	1071	1205	1294	1428
1	7	12	16	21	1040	1170	1257	1387
1	7	13	16	22	1011	1138	1222	1348
1	7	13	17	22	984	1107	1189	1312
1	8	13	17	23	958	1078	1158	1277
1	8	14	18	23	933	1050	1128	1245
1	8	14	18	24	910	1024	1100	1213

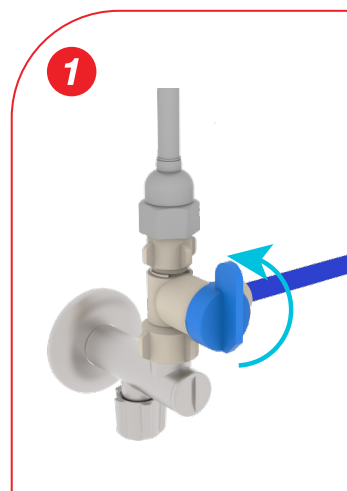

MADE IN ITALY

